Verbatim LED PAR16 GU10 7W 3000K 350lm

3000K Warm White 350 LM DIM

- GU10 Socket
- 220 - 240V
- 30,000 hours Lifetime
- Dimmable
- 86% Energy Saving
- Equivalent to 51W incandescent bulb

Product Number	52301
General Data	
Lamp Socket	GU10
Electric Data	
Wattage (W)	7
Wattage Equivalent (W)	51
Voltage (V)	220 - 240 V
Dimmable	yes
Power Factor	0.7
Operating Frequency (Hz)	50-60
Geometric Data	
Length (mm)	60
Diameter (mm)	50
Weight (g)	65
Photometric Data	
Luminous Flux 90° Cone (lm)	350
CRI	80
CCT (K)	3000
Luminous Intensity (cd)	680
Beam Angle (°)	36
Luminous Efficacy (lm/W)	50
Lifetime (hrs)	30,000
Switching Cycle	20,000



24/02/2015

24/02/2015

Photometric Diagrams

24/02/2015

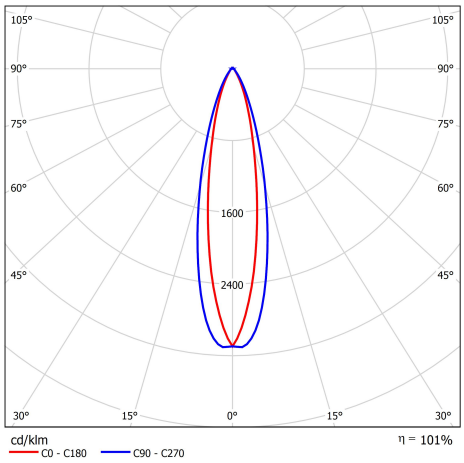

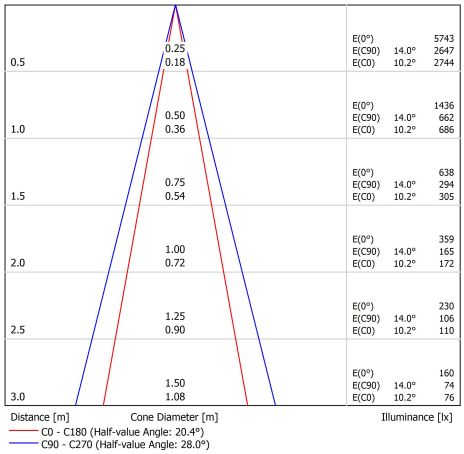

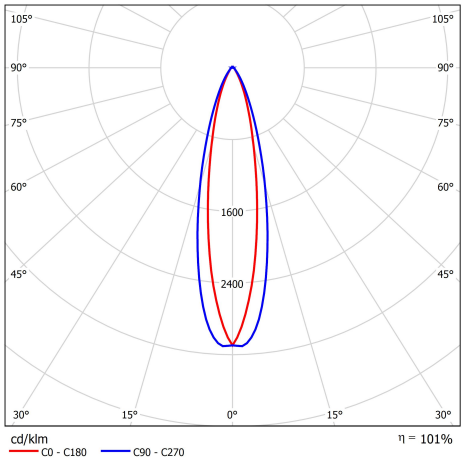

THE KAITEKI COMPANY Mitsubishi Chemical Holdings Group
Verbatim Technology you can trust

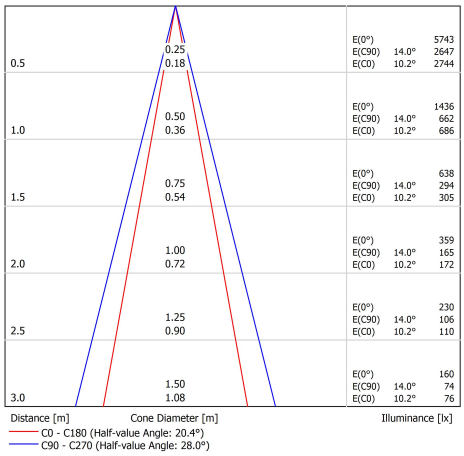
0.5
0.25
0.18
E(0°) 5743
E(C90) 14.0° 2647
E(C0) 10.2° 2744
1.0
0.50
0.36
E(0°) 1436
E(C90) 14.0° 662
E(C0) 10.2° 686
1.5
0.75
0.54
E(0°) 638
E(C90) 14.0° 294
E(C0) 10.2° 305
2.0
1.00
0.72
E(0°) 359
E(C90) 14.0° 165
E(C0) 10.2° 172
2.5
1.25
0.90
E(0°) 230
E(C90) 14.0° 106
E(C0) 10.2° 110
3.0
1.50
1.08
E(0°) 160
E(C90) 14.0° 74
E(C0) 10.2° 76
Distance [m]
Cone Diameter [m]
Illuminance [lx]
C0 - C180 (Half-value Angle: 20.4°)
C90 - C270 (Half-value Angle: 28.0°)

24/02/2015

Energy Rating

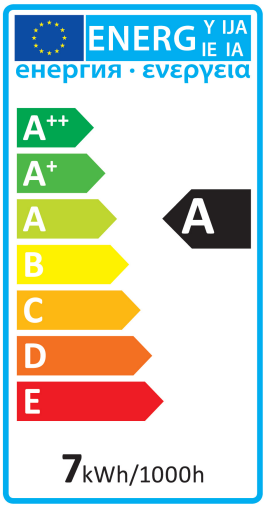

Technical Packaging Details

Barcode
023942523017

EAN 128
(02)00023942523017(37)10(91)204

EAN 14
50023942523012

Pack Dimensions(HxWxL)
H85 x W53 x L53 (mm)

MOQ
10

Carton Dimensions (HxWxL)
H98 x W120 x L280 (mm)

Cartons/Pallet
192

Layers/Pallet
8

Units/Pallet
1920

24/02/2015